


SYN 200-XH-US-1

- Easy to operate, Integrated 200A circuit breaker on the grid side, No need for external circuit breakers.
- Integrated split-phase transformer inside the system supporting 120V/240V split-phase output.
- With remote wake-up and intelligent switching functions.
- Integrated generator access function.
- NAME 4X protection level.

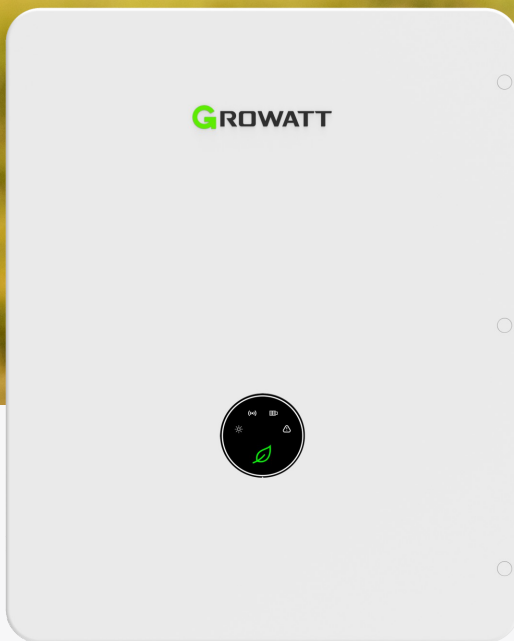

GROWATT

P O W E R
- I N G
T O M O -
R R O W O

Model	SYN 200TL-XH-US
INPUT FROM GRID	
Max. AC Input Overcurrent Protection	200A
Max. Continuous Input Current	160A
AC Output Voltage(Nominal)	240V
AC Output Voltage Range	180-270V
AC Frequency(Nominal)	60Hz
AC Frequency Range	45-65Hz
Grid Disconnection Switchover Time	<500ms
AC TO MAIN DISTRIBUTION PANEL	
Max. AC current output	200A
AC L-L output voltage (nominal)	240V
AC L-L output voltage range	180-270V
AC Frequency (nominal)	60Hz
AC Frequency range	45-65Hz
Max. inverters AC current output in backup operation	48A
Imbalance compensation in backup operation	3000W
AC L-N output voltage in Backup (nominal)	120V
AC L-N output voltage range in backup	105-132V
AC frequency range in backup	55-65Hz
INPUT FROM INVERTER	
Number of Inverter Inputs	3
Rated AC Power	11400W
Max. Continuous Input Current@240V	48A*3
Rated AC Power in Continuous Backup Operation	11400W*3
Inverter Input AC Circuit Breaker	63A
GENERATOR(optional)	
Max. Rated AC Power	20000W
Max. Continuous Input Current	100A
Dry contact switch voltage rating	250Vac
Dry contact switch current rating	5A
2-wire Start	Yes
EV Charger(optional)	
Max. Output current	32A
RDC protection	Yes
ADDITIONAL FEATURES	
Communication	RS485
Manual Control Bypass Switch	Yes
Energy Meter(for Import/Export)	1% accuracy
Cooling	Natural convection
Noise	< 35dB
Operating Temperature Range	-40 to +50°C
Protection Rating	IP65/NAME Type 4X
Operating Humidity(RH)	Up to 100%
Maximum Elevation	3000m
Mounting options	Wall mount
Weight	26.7kg
Dimensions(H/W/D)	550/445/160mm
STANDARD COMPLIANCE	
Safety	UL1741, CSA 22.2 NO. 107, UL869A
Emissions	FCC part15 class B